

# LG Water Solutions

# Data Sheet



## Brackish Water Reverse Osmosis (RO) Membranes

### LG BW 4040 ES



## Overview

LG Chem's NanoH<sub>2</sub>O™ brackish water RO membranes serve various municipal and industrial applications. LG BWRO, all incorporated with innovative Thin Film Nanocomposite (TFN) technology, is offered in industry standard configuration easily fit into existing or new RO plants. Global clients in more than 50 countries have already experienced LG BWRO and superior quality and performance of the membranes lead to repeat customers.


LG BW ES(Energy Saving) membranes offer significant energy savings with good water quality and robustness for RO systems operating with low to medium TDS brackish waters.

## Product Specifications

\* 4-inch spiral wound membrane

Active Membrane Area ft <sup>2</sup> (m <sup>2</sup> )	Permeate Flow Rate GPD (m <sup>3</sup> /d)	Minimum Salt Rejection (%)	Stabilized Salt Rejection (%)	Feed Spacer (mil)
85 (7.9)	2,500 (9.5)	99.2	99.5	28

Test Conditions : 2,000ppm NaCl @ 25°C(77°F), 150psi (10.3bar), pH 8, Recovery 15%. Permeate flows for individual elements may vary +/- 20%.

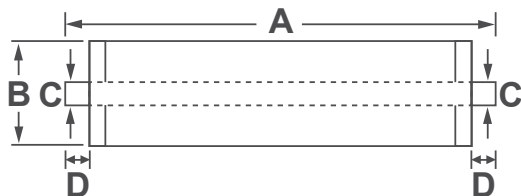

A mm (in.)	B mm (in.)	C mm (in.)	D mm (in.)	Weight kg (lbs.)
1,016 (40)	100 (3.9)	19 (0.75)	28 (1.1)	4 (9)

## Operating Specifications

For more information and operating guidelines, visit [www.LGwatersolutions.com](http://www.LGwatersolutions.com)

<b>Max. Applied pressure</b>	600psi (41bar)
<b>Max. Chlorine concentration</b>	< 0.1 ppm
<b>Max. Operating temperature</b>	45°C (113°F)
<b>pH Range, Continuous (Cleaning)</b>	2-11 (2-12)
<b>Max. Feedwater turbidity</b>	1.0 NTU
<b>Max. Feedwater SDI (15 mins)</b>	5.0
<b>Max. Feed flow</b>	16gpm (3.6m <sup>3</sup> /h)
<b>Max. Pressure drop (ΔP) for each element</b>	15psi (1.0bar)

The information and data contained herein are deemed to be accurate and reliable and are offered in good faith, but without guarantee of performance. LG Chem assumes no liability for results obtained or damages incurred through the application of the information contained herein. Customer is responsible for determining whether the products and information presented herein are appropriate for the customer's use and for ensuring that customer's workplace and disposal practices are in compliance with applicable laws and other governmental enactments. Specifications subject to change without notice. NanoH<sub>2</sub>O is the Trademark of The LG water solutions or an affiliated company of LG chem. All rights reserved. © 2017 LG Chem, Ltd.

Contact LG Chem Water Solutions

• America +1 424 218 4042 • Europe, Africa except Egypt +34 678 444 020 • Middle East, Egypt +971 50 624 3184  
 • Korea +82 2 3773 6572 • China +86 135 8181 3295 • India +91 9810013345 • South East Asia +65 9749 7471

Rev. I (02.17)

